

Give us a call!

**We'd be happy to set up an
appointment today!**



Ultra Spill Pallets

**Spill Prevention, Controls,
Countermeasures -
SPCC Plans &
Implementation**

**NBI Engineering Services
and
Naastad Brothers, Inc.**



Ultra-275 Containment Sump



33" - Oval Containment

NBI Engineering Services
division of Naastad Brothers, Inc.



1785 149th Ave NE
Hatton, ND 58240
701.361.0350 cell
701.543.3821 office
701.543.9813 fax

Benjamin M. Naastad P.E.
Project Manager
ben@naastadbrothers.com
www.naastadbrothers.com

TSP Certified P.E.




Ultra IBC Spill Pallet Plus

Your one stop shop for
containment needs with the
service you deserve!

Ben's Cell: 701-361-0350
Office: 701-543-3821
Fax: 701-543-9813
E-mail: ben@naastadbrothers.com
Website: www.naastadbrothers.com

NBI Engineering Services Provides...

- Personal onsite facility investigation to assess containment needs
- Consultation on containment options that best fit your facility's requirements
- TSP Professional Engineer certified for NRCS funding
- Compile and professionally certify your SPCC plan. Plan addresses all aspects of EPA 40 CFR 112 along with user friendly tables and appendices needed to complete documentation requirements.
- Plan is submitted in a 3-ring binder for easy addition of inspections and logs as they are completed
- Electronic copy included with all plans

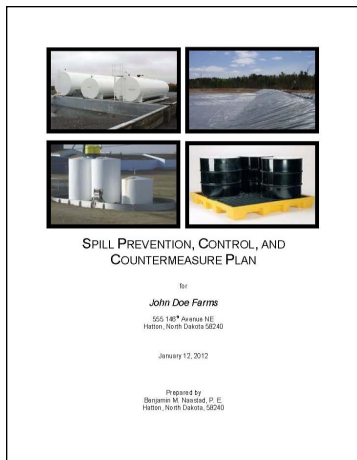

Who requires SPCC implementation?

- A total cumulative aboveground storage capacity of 1,320 gallons. This includes any container capable of holding 55 gallons or more.
- Tier I: 1,320-5,000 gallons—Self certify
- Tier II: 5,001-10,000 gallons—Self certify
- Tier III: > 10,000 gallons—PE certification

Containment Options

- Steel Containment with liner
- Concrete Containment with or without liner
- Earthen Containment
- Double-walled Tanks
- Poly-Containment Sumps
- Spill Decks and Pallets
- Spill Kits



95-Gallon Spill Kit

Naastad Brothers Inc. Provides...

- Sales of containment systems and accessory items
- Site preparation for containment structure
- Construction of bulk containment (steel with liner or earthen) in accordance with the facility's SPCC plan
- Assistance with placement of emptied fuel tanks within the containment
- Assistance with finding components needed to complete full installation (electrical, pumps, venting, inspections, etc)



33" Rectangle Containment